

ALLEN&HEATH




XONE:92


PARTS IDENTIFICATION DOCUMENT

DISTRIBUTOR USE ONLY


ISSUE 6.0

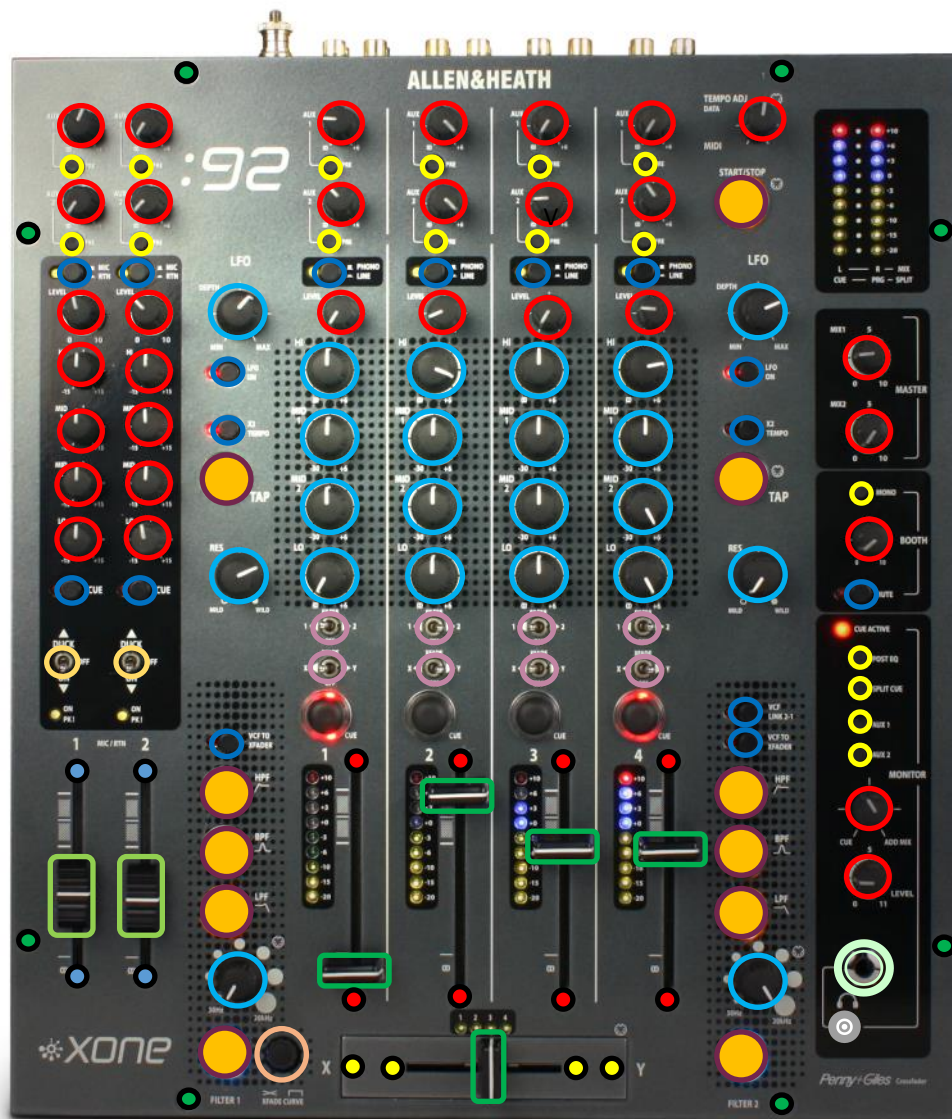


Icon	Description	Part#
	EQ knob	AJ7305
	Gain knob	AJ7304
	Fader knob	AJ5320
	Mic fdr knob	AJ3503
	8mm sw cap	AJ4251
	5mm sw cap	AJ5388
	Duck Switch	AL5327
	X-Y Switch	AL5328
	13mm sw ca	AJ5325
	Ltpipe ring	AJ5324
	H/P nut	AL0328
	Pot nut black	AB8172
	Curve knob	AJ5558
	3.5mm H/P	AL5323
	Screw M3X8	AB0074
	Screw M3X5	AB0070
	Screw M2X4	AB3329
	Screw M3X4	AB2811



Mic Fader	Stereo fader	X-fader	Rotary (92R)
002-684	003-144	AI4222	003-145
Potentiometer	Potentiometer	Potentiometer	Potentiometer
AI3661	AI5326	AI4222	AI4964

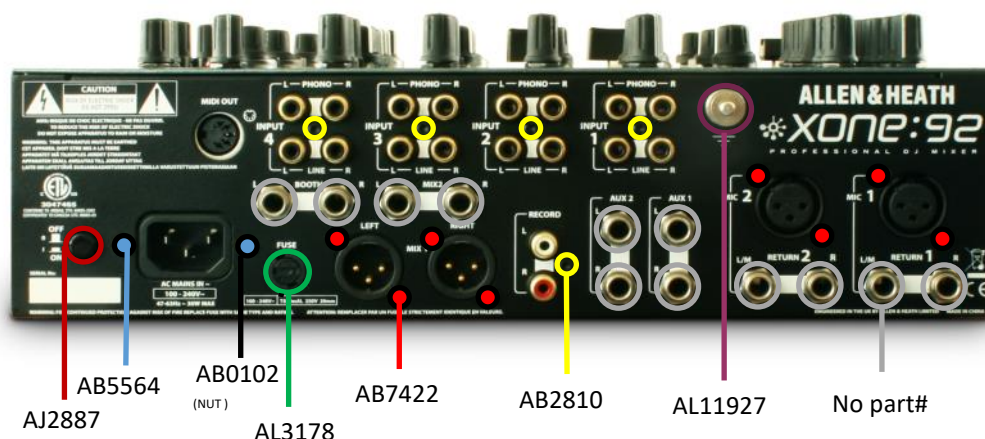

(Part can be supplied on request)

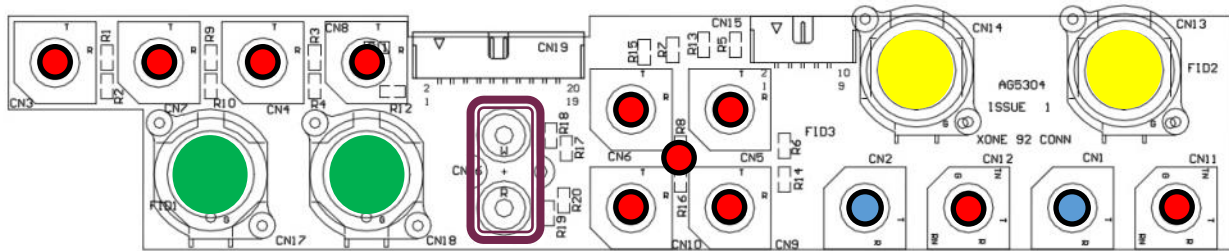

003-142 PCB ASSY XONE:92 CONN


IMPORTANT INFORMATION FOR SPARES & SERVICE:

004-1406 assemblies (new AM5547_1, AG5609 **issue 6** and *modified* AG5609 Issue 4 PCBs) **must only be used on products with ECN4660 earthing implemented.**

	AL9136
	AL9137
	AL2410
	AL2411
	AL3753

Where 004-1406X is supplied in replacement for spares or service, parts fitted preceding ECN4660 and units below serial# X92/220X989024 **must** be updated in line with ECN4660 changes.


Refer to **REC4660** for required **003-142** and **004-244** modification.

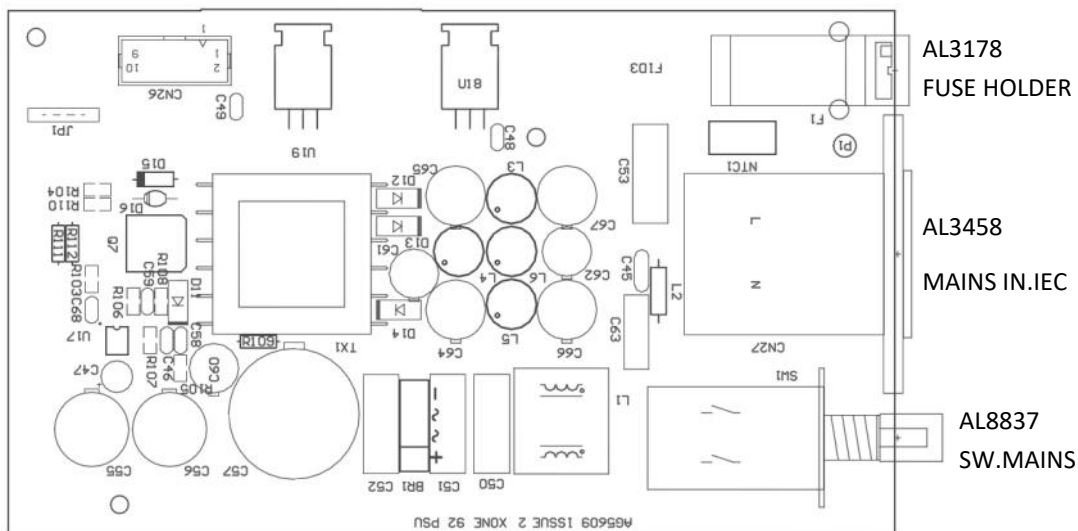

003-233X only use on product pre ECN4660

004-1406X only use on product post ECN4660

(X92/220X989024 20/02/2021)

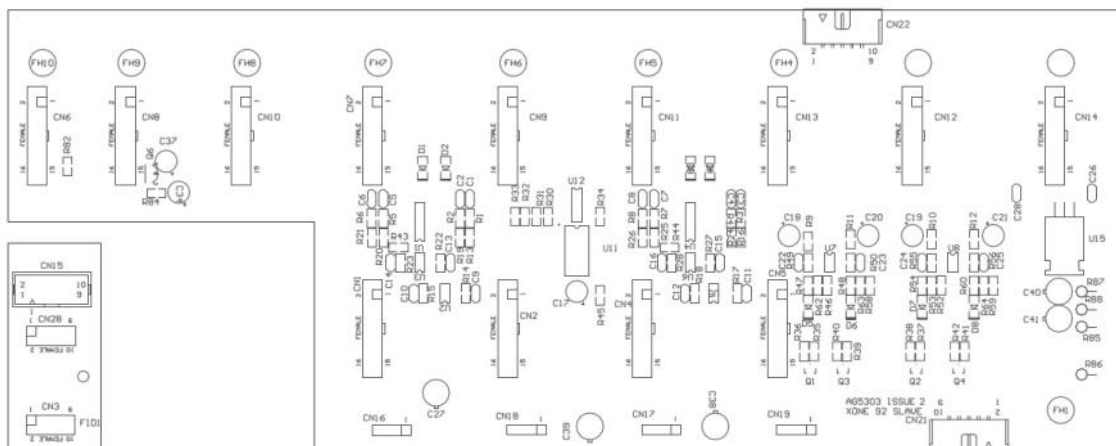


004-244 PCB ASSY XONE:92 SLAVE

Slave original PCB 003-141 has been up issued to 004-244 .

Do not fit 003-141 in place of a 004-244

ALLEN & HEATH

COMPATIBILITY DOCUMENT

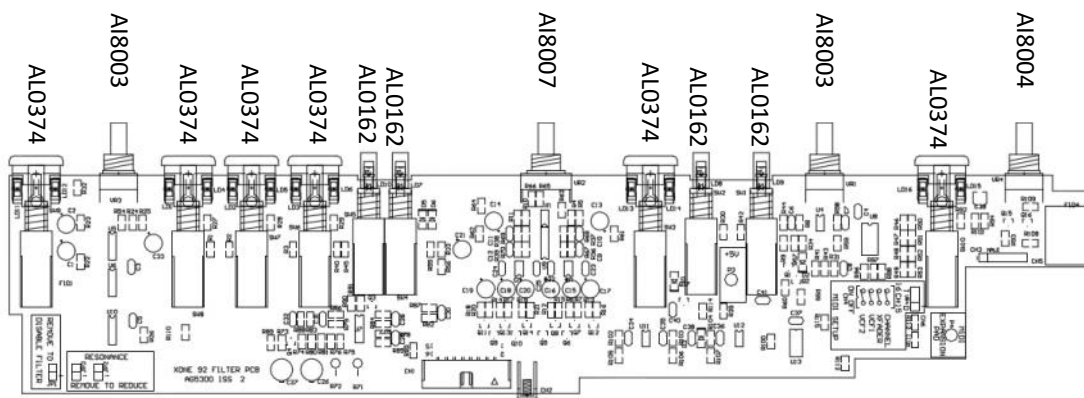

004-543 PCB ASSY XONE:92 FILTER 1

004-544 PCB ASSY XONE:92 FILTER 2


SUBJECT: Filter PCB Compatibility
 DATE: 05/12/14
 DOCUMENT: Compatibility Document
 MODEL(S): Xone:92 Xone:92-R

Due to components going obsolete, filter PCBs had to be up-issued. This resulted in back compatibility issues.

The chart shown here illustrates which PCB part numbers are compatible, should one have to be replaced for repair.

Refer to [REC N 3057](#) for details of the component changes


COMPATIBLE		INCOMPATIBLE						COMPATIBLE	
ALL 003-14X		x	x	x	x	x	x	ALL 004-24X	
Filter 1	AG5300	AG8626	AG5300	AG5300	AG8626	AG5300	AG8626	AG8626	Filter 1
Slave	AG5303	AG5303	AG8627	AG5303	AG8627	AG8627	AG5303	AG8627	Slave
Filter 2	AG5300	AG5300	AG5300	AG8626	AG5300	AG8626	AG8626	AG8626	Filter 2
YES		NO	NO	NO	NO	NO	NO	YES	
?		X	X	X	X	X	X	?	

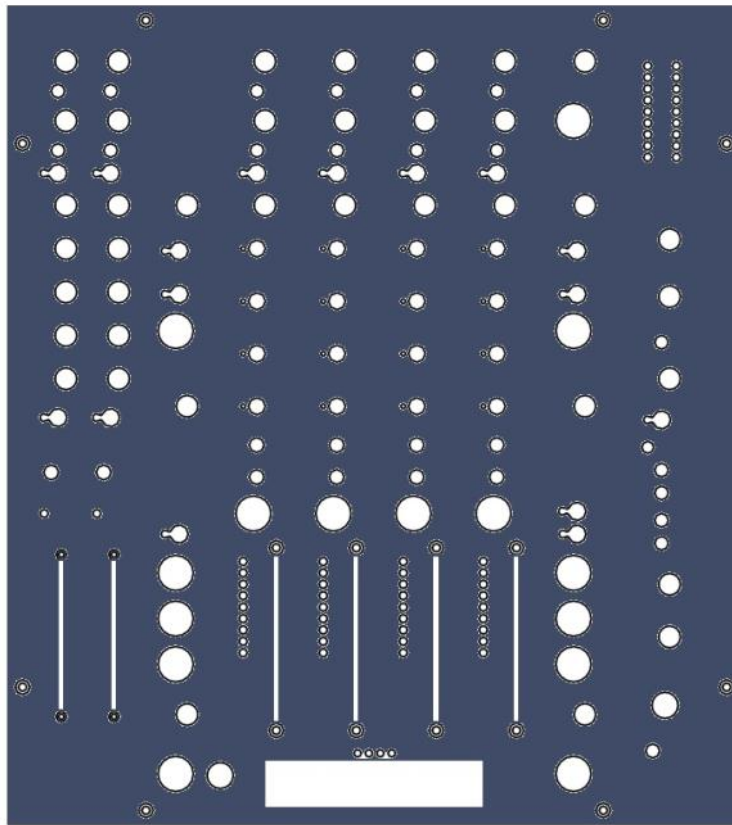

AA7581 FRONT PNL XONE:92 LINEAR(STORM G)



AA7578 CHASS. XONE:92 ARTWORK

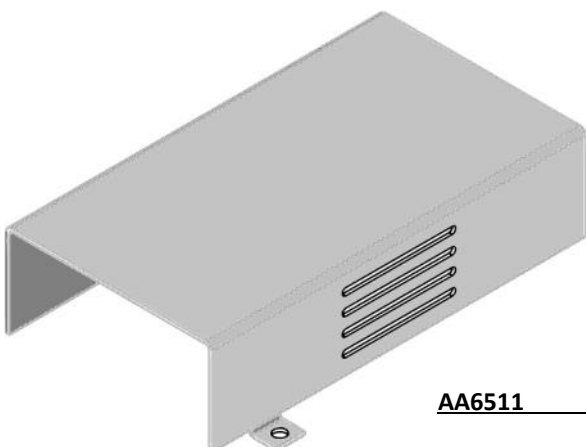

AA6511 SHIELD XONE



AA7492 FDR PNL XONE2 P&G(STORM G)




AL5322 XONE:92 MASTER to CONNECTOR



AL5904 Mic to H/PHONE



AL3822 Conn to Master



AL3817 WFMA XONE 4WAY



AK0102 FEET FAST



AL11927 PHONO SHORTING PLUG



AL3534 FUSE 20MM 500MA A/SURGE